



Teletruk variable reach materials handler

- Unrivalled Visibility
- Single Side Loading
- 111 Degrees of Carriage Tilt
- High Capacity Forward Reach
- Ideal for Van and Container Loading
- Compact and Maneuverable
- Precision and Control
- Hydrostatic Drive Reliability


Teletruk LPG models are powered by the reliable Kubota 2503 engine.

Teletruk diesel models are powered by a clean burning Kohler 2504 engine which does not require DEF, DPF or a regen cycle.

The Teletruk is more than a forklift. Easily change from forks to a bucket or other attachments using the quick disconnect system.



Teletruk Variable Reach Forklifts

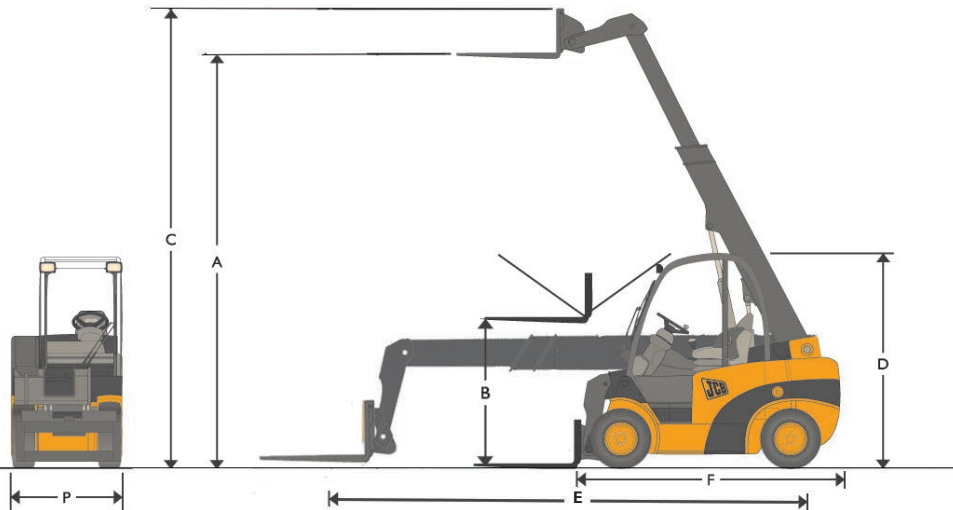

		TLT25G	TLT27G	TLT30G	TLT30DHL	TLT35D	TLT35D
		2WD				4WD	
LIFT CAPACITY @ 24" LC (LBS/KG)		5,500/ 2,495	5,940/ 2,694	6,600/ 2,994	6,600/ 2,994	7,700/ 3,493	
LIFT CAPACITY @ 24" LC FULL UPWARD REACH (LBS/KG)							
LIFT CAPACITY @ 24" LC FULL FORWARD REACH (LBS/KG)		2,650/ 1,202	2,900/ 1,315	3,640/ 1,651	3750/ 1,701	4630/ 2,100	5291/ 2,400
MAXIMUM FORWARD EXTENSION (IN/CM)	E	88/224			130/330	89/226	94/239
MAXIMUM LIFT HEIGHT (FT/CM)	A	13/ 396			16'10"/ 513	14'4"/ 437	
FREE LIFT (IN/CM)	B	56/142.5					53/135
MAXIMUM HEIGHT BOOM EXTENSION (FT/CM)	C	15'2"/ 462			18'8"/ 569	16'7"/ 505	
HEIGHT OF CAB (IN/CM)	STD	86/218		87/221		89/226	91/231
	LP	82/208		83/211		87/221	
LENGTH TO FORK FACE (IN/CM)	F	104/264		108/274	133/338	118/300	126/320
MAXIMUM WIDTH (IN/CM)	P	47/119		50/127			55/140
UNDERCLEARANCE (IN/CM)		5/13			6/15		7/18
TURNING RADIUS (IN/CM)		96/244		98/249	114/290		138/351
AISLE WIDTH 90 DEGREE STACKING (IN/CM)		155/394		158/401	184/467		207/526
ENGINE TYPE		GAS			DIESEL		
ENGINE MODEL		KUBOTA			KOHLER		
GROSS ENGINE OUTPUT (HP)		57			62		
RATED RPM		2,400			2,600		
DRIVE TYPE		HYDROSTATIC					
UNLADEN WEIGHT (LBS/KG)		9,436/ 4,280	9,700/ 4,400	10,935/ 4,960	11,860/ 5,380	11,220/ 5,089	12,125/ 5,500
SPEED (MPH/KPH)		12/19					

Standard features

Easy access to the refueling and daily service checks. The cab tilts up for full access to components.

Massive 111 degree tilt for use with attachments or to safely manipulate loads.

Standard free lift up to 55" for highly productive and safe trailer and container unloading.

Full lift capacity at full lift height.

Hydrostatic drive means there are no clutches or brakes to wear. The hydrostatic transmission provides passive braking during deceleration which reduces the need for active brake use.

Extremely reliable and well known Kohler and Kubota engines for long service life. No DPF or regen cycles required.

Operator's Enclosure

Comfortable and ergonomically-designed operator's enclosure meets North American safety standards for roll-over protection (ROPS) and falling object protection (FOPS).

Boom

"Slimline" boom allows maximum visibility of the forks. Wear pad design eliminates chain and roller maintenance of masted machines.

Optional front attachment methods are available to easily mount a myriad of attachments.

Standard equipment

- Fully adjustable suspension seat with retractable seatbelt
- Lighting kit includes two headlights, amber strobe and one rear light
- Hose burst check valves on tilt, lift and extension cylinder circuits
- Full-time all-wheel drive on 4WD units
- Back up alarm
- 2 year / 3,000 hour warranty

