CAPACITY 5000 lbs.

WEIGHT 160 lbs.

WHEELS / TIRES

STEER-STEEL HUB (2)8" x 2.4" polyurethane LOAD-STEEL HUB (2)2.9"" x 3.9" polyurethane STEER ARC 210°

WHEELS

Standard non-marring polyurethane over cast iron steer wheels load wheels. Phenolic entry and exit roller and tapered fork tip eases transition in and out of pallets with bottom boards.



ADJUSTABLE

Tubular push rods for reliable performance and allows field adjustment when forks become misaligned, facilitating maximum serviceability.



ERGONOMIC CONTROL

Three position hydraulic lever: Lifting, neutral, and lowering. Allows for safe controlled load placement. Handle return spring keeps operator handle to vertical position.



FRAME

Ridged reinforced steel C-channel construction helps resist twisting during heavy loading or misaligned load. Durable powder coat paint.

HYDRAULICS

P50

Manual

APPLICATIONS,

WORK CELLS.

Pallet Truck

ALL AROUND MANUAL PALLET TRUCK SUITABLE FOR LIGHT DUTY

UNLOADING TRUCKS, & STAGING

LOADING AND


Galvanized housing with sturdy construction. Precision welded pump assembly is fully sealed and features hardened chrome lift cylinder, overload bypass valve and uniquely designed packing seals. Self lubricating pushing at all pivot points helps minimize wear and improve efficiency.

AVAILABLE FORK DIMENSIONS

- 27" wide x 48" long STD
- Fork widths- 20.5"
- Fork lengths 36" / 42"

WARRANTY

- 6-months on frame and pump
- · 90-Days on wheels, axles, bearings and bushings

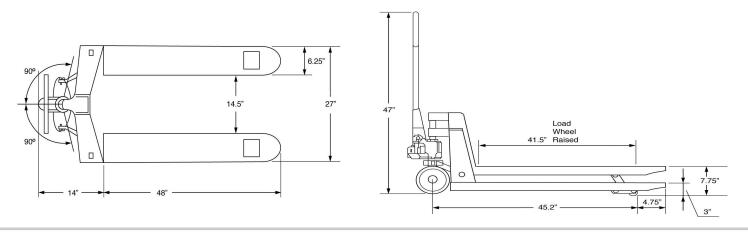

Certification All units are built to be in compliance with the Occupational Safety & Health Act (OSHA)

Big Lift LLC will not assume liability for injuries or damage arising from, or caused by, the removal of any safety devices from their vehicles by user. Because of Big Lift continuing to improve its products, specifications are subject to change without notice

Big Lift LLC www.bigjoeforklifts.com **DE** 630-916-2600