



STM55A

5500 lbs Capacity

SERIES II



www.sellickequipment.com



STM55A SERIES II TRUCK MOUNTED FORKLIFT

Model	Ref	STM55A SERIES II		
		80" Lift	120" Lift	144" Lift
Lift capacities @ 24" load center		5,500 lbs/2,500 kg		
Base operating weight (without forks)		5,760 lbs/2,613 kg	6,025 lbs/2,733 kg	6,175 lbs/2,801 kg
Overall length (without forks)	A	98"/2,489 mm		
Overhang*		60"/1,524 mm		
Overall width	B	100.5"/2,553 mm		
Height to top of OHG	C	101"/2,565 mm		
Frame opening	D	60"/1,524 mm		
Outside turning radius		108"/2,743 mm		
Mast sideshift		6"/152 mm		
Mast underclearance	E	12"/305 mm	10"/254 mm	10"/254 mm
Mast tilt - forward	F	12°		
Mast tilt - rearward	G	8°		
Gradeability		25%		
Wheelbase	H	66"/1,676 mm		
Tire size		31 - 15.5, 10 x 16.5		
Engine build/model		Kohler KDI 1903TCR Tier 4 compliant		
Engine type		Diesel, turbocharged, electronic		
Cylinders		3		
Engine output		56 hp		
Transmission type		Hydrostatic		

*Minimum Achievable

Because of our constant dedication to product improvement, all specifications are subject to change without notice.

-All Sellick truck-mounted forklifts meet or exceed ANSI/ITSDF B56.14 - 2015 Standards for Vehicle Mounted Forklift Trucks.-

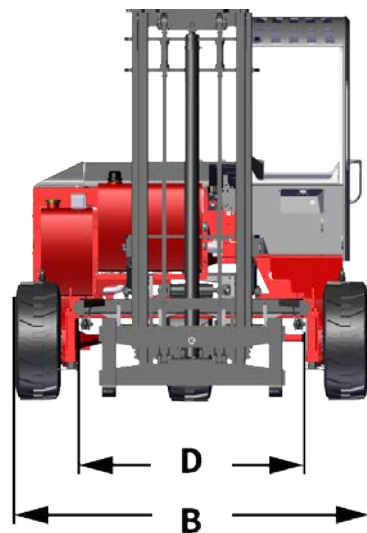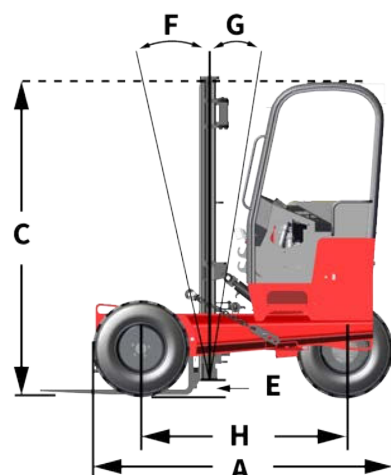

www.sellickequipment.com



Sellick Equipment Limited
2131 Roseborough Rd
Harrow, ON, Canada N0R 1G0
519-738-2255