



STM55A-4W

5500 lbs Capacity

SERIES II



www.sellickequipment.com

*Shown in blue colour option


STM55A-4W TRUCK MOUNTED FORKLIFT

Model	Ref	STM55A-4W	
Lift Heights		120"	144"
Lift capacities @ 24" load center		5,500 lbs/2,495 kg	
Operating weight w/ 144" mast(without forks)		6,895 lbs/3,128 kg	7,045 lbs/3,196 kg
Overall length (without forks)	A ¹	98"/2,489 mm	
Overall length (with 48" forks)	A ²	114"/2,895 mm	
Overhang*		60"/1,524 mm	
Overall width (standard mode)	B ¹	101"/2,565 mm	
Overall width without forks (4WAY mode)	B ²	97"/2,464 mm	
Overall width with 48" forks (4WAY mode)	B ³	111"/2,819 mm	
Height to top of OHG	C	103"/2,616 mm	
Frame opening	D	58.5"/1,486 mm	
Outside turning radius (standard mode)		108"/2,743 mm	
Mast sideshift		6"/152 mm	
Mast underclearance	E	10"/254 mm	
Mast tilt - forward	F	12°	
Mast tilt - rearward	G	8°	
Gradeability (Standard mode)		25%	
Wheelbase	H	66"/1,676 mm	
Tire size (Front/Rear)		31.5 - 13 / 31 - 15.5	
Engine build/model		Kohler KDI 1903TCR Tier 4 compliant	
Engine type		Diesel, turbocharged, electronic	
Cylinders		3	
Engine output		56 hp	
Transmission type		Hydrostatic	

*Minimum Achievable

Because of our constant dedication to product improvement, all specifications are subject to change without notice.

-All Sellick truck-mounted forklifts meet or exceed ANSI/ITSDF B56.14 - 2015 Standards for Vehicle Mounted Forklift Trucks.-

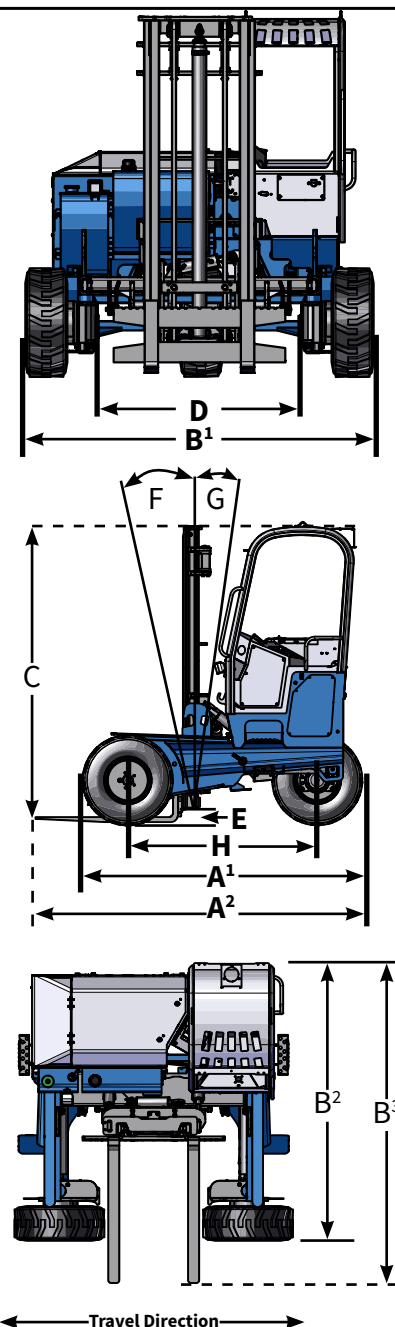

www.sellickequipment.com



Sellick Equipment Limited
2131 Roseborough Rd
Harrow, ON, Canada N0R 1G0
519-738-2255