

Standard specifications

The low profile rough terrain SLP Series forklift is ideally suited for work in tight spaces. Featuring a proven drivetrain, tight turning radius, and ROPS/FOPS overhead guard, this forklift is an exceptional performer on any surface.

Engine

KOHLER KDI 2504 TCR Tier 4 engine



does not require exhaust aftertreatment. Diesel Particulate Filter (DPF) and Diesel Exhaust

Fluid (DEF) are not required reducing operating costs. Engine is equipped with fuel/water separator with hand primer, dual element air filter, air pre-cleaner, cold weather starting aid & vertical exhaust.

Transmission

Four-speed power reversing synchroshuttle transmission with torque converter and integral parking brake. 4-speed fully automatic transmission standard on 4WD models.

Axles

High load capacity drive & steer axles provide less wear and low maintenance. Limited slip differential provides increased traction.

Brake system

Enclosed multi-disc, oil-immersed service brakes with mechanically-operated, lever applied, parking brake.

Steering

Load sense power steering.

Instruments

Full instrument package includes warning indicator lights & gauges.

Mast assemblies

Sellick SEE-THRU® all-roller mast design. A wide range of two or three-stage available with maximum lift height up to 22 ft. Mast sideshift: 6" total.

Standard equipment

- Suspension seat w/seatbelt*
- 2 front & 2 rear LED worklights
- LED brake & amber flashing lights
- Neutral safety start
- Tilt steering wheel
- Horn & backup alarm

*Suspension seat standard on 85" platform only


Optional equipment

- Fully enclosed cab with heat
- Hydraulic fork positioning
- AM/FM/MP3
- Cold weather package
- Solid cushion tires

SLP SERIES

TECHNICAL SPECIFICATIONS

Lift capacities of 5,000, 6,000, 8,000 or 10,000 lbs @ 24" load centre

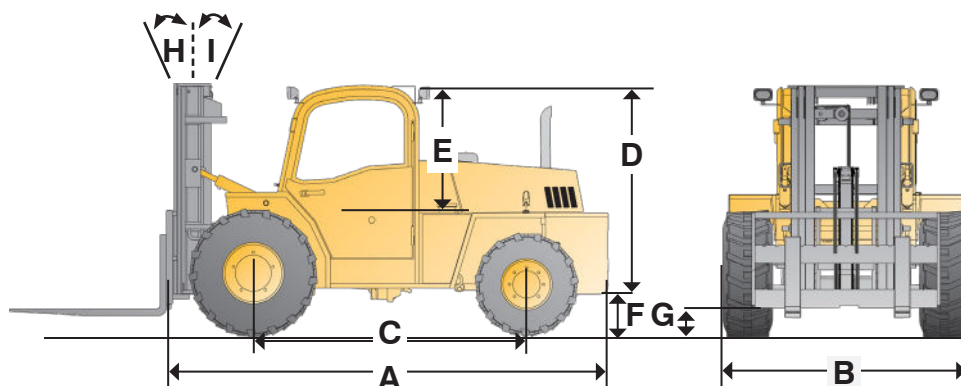

	Ref	SLP50	SLP60	SLP80	SLP100
Lift capacities @ 24 in load center (lbs)		5000	6000	8000	10000
Total weight (w/2 stage mast) (lbs)		11000	12600	13700	14700
Overall length (without forks)	A	147"/3734 mm		152"/3861 mm	153"/3886 mm
Overall width	B	78"/1981 mm			
Wheelbase	C	93"/2362 mm			
Height to top of overhead guard	D	75"/1905 mm 85"/1143 mm			
Distance from seat to overhead guard	E	40"/1016 mm (75" OHG) 45"/1143 mm (85" OHG)			
Outside turning radius		2WD - 178"/4521 mm 4WD - 196"/4978 mm			
Frame underclearance	F	11"/279 mm			
Mast underclearance	G	12"/304 mm			
Mast sideshift		6"/152 mm			
Mast tilt - forward	H	20°			
Mast tilt - rearward	I	10°			
Gradeability		25%			
Tire size		Drive: 15-19.5-12 ply Steer: 12-16.5-10 ply			
Engine manufacturer & model		KOHLER KDI 2504 TCR - Tier 4 Final			
Cylinders		4			
Engine output (gross power)		74 hp @ 2600 RPM			
Peak torque		221 ft lbs @ 1500 RPM			
Travel Speed		15 mph/24 kmh			

Because of our constant dedication to product improvement, all specifications are subject to change without notice.

All Sellick forklifts meet or exceed all ANSI B56.6 safety standards.

Sellick Equipment Limited

P.O. Box 1000/2131 Roseborough Rd
Harrow, Ontario, Canada • N0R 1G0
519-738-2255 • sellick@mnsi.net
www.sellickequipment.com



Sold & serviced by:

